

Shackle load cell up to 15 t

Model F5302



WIKA data sheet FO 51.23

Applications

- Lifting and weighing

Special features

- Measuring ranges 0 ... 7.5 t, 0 ... 10 t, 0 ... 15 t
- Measuring tension of wire ropes
- Suitable for retrofitting, easy to install
- High shock and vibration resistance
- Protection class IP67



Shear beam load cell, model F5302

Description

Shackle load cells are designed for lifting and weighing in rugged or harsh environments. They provide a simple and reliable method of measuring a wide range of weights and loads. They consist of a shackle and a load pin.

They are easy to install because use don't differ from standard shackles. The dimensions of the shackle load cells correspond to the standard shackle sizes.


The load cells F5302 are made of high-strength, corrosion-resistant stainless steel 1.4542, which is particularly suitable for their application areas. The standard active current and voltage outputs are available as output signals (4 ... 20 mA / 0 ... 10 V).

Technical data in accordance with VDI/VDE/DKD 2638

Model F5302	
Nominal load F_{nom} t	7,5 / 10 / 15
Relative linearity error d_{lin} ¹⁾	$\leq \pm 1 \% F_{nom}$
Relative creep, 30 min.	$\leq \pm 0.1 \% F_{nom}$
Relative reversibility v	$\leq \pm 0.2 \% F_{nom}$
Relative repeatability error in unchanged mounting position b_{rg}	$\pm 0.05 \% F_{nom}$
Permissible oscillation stress acc. to DIN 50100 F_{rb}	$\pm 80 \% F_{nom}$
Temperature effect on zero signal TK_0	$\leq \pm 0.2 \% / 10 K$
Temperature effect on characteristic value TK_C	$\leq \pm 0.2 \% / 10 K$
Force limit F_L	$150 \% F_{nom}$
Breaking force F_B	$> 300 \% F_{nom}$
Material	Stainless steel
Rated temperature range $B_{T, nom}$	-20 ... 80° C
Operating temperature range $B_{T, G}$	-40 ... 80° C
Storage temperature range $B_{T, S}$	-40 ... 85° C
Electrical connection	Circular connector M12 x 1, 4-pin
Output signal (rated output) C_{nom}	4...20 mA - 2-wire DC 0...10 V - 3-wire
Current consumption	Current output 4...20 mA: signal current Voltage output: approx. 8 mA
Supply voltage	DC 10 ... 30 V for current output DC 14 ... 30 V for voltage output
Burden	$\leq (U_B - 6 V) / 0.024 A$ for current output $> 10 k\Omega$ for voltage output
Response time	$\leq 1 ms$ (within 10 ... 90 % F_{nom})
Protection (acc. to IEC/EN 60529)	IP67
Noise emission	In accordance with DIN EN 55011
Noise immunity	In accordance with DIN EN 61326

1) Relative linearity error acc. to VDI/VDE/DKD 2638 chap. 3.2.6.



Dimensions in mm

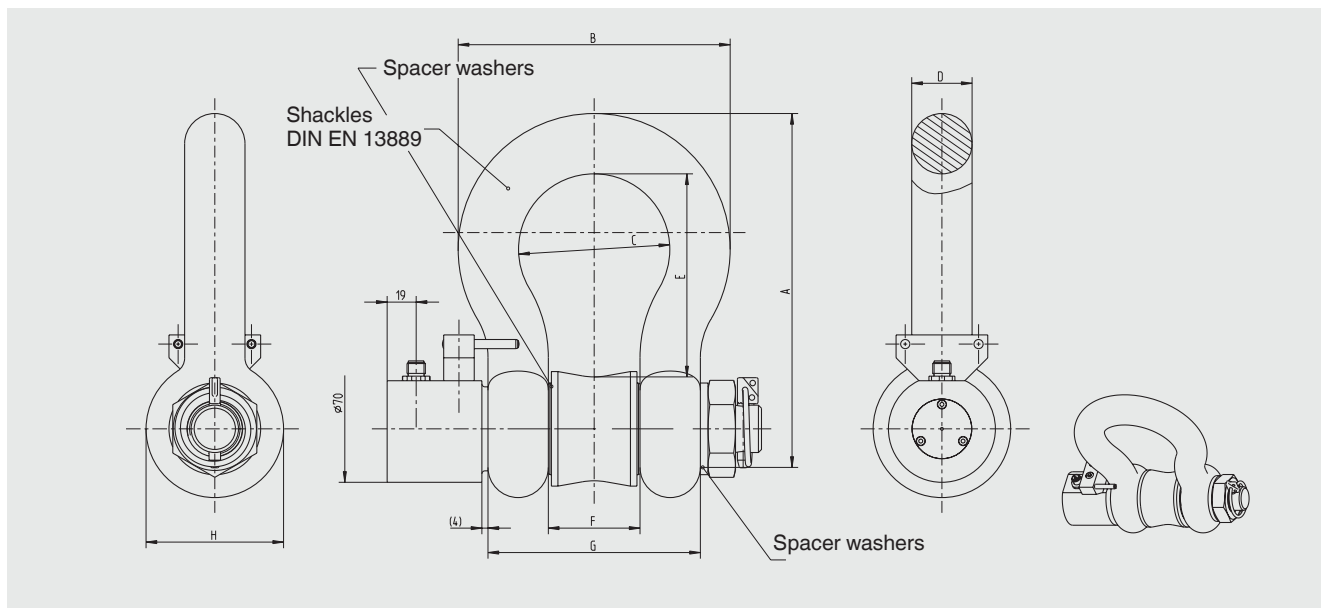



Nominal load in t	Shakle carrying capacity (t)	A	B-max	C	D-max	E	F	G-max	H-max
7.5	13.5	240	170	92 ± 5	36.5	120 ± 5	57 ± 4	134	80
10	17	262	183	99 ± 5	39.5	134 ± 5	60 ± 4	143	89
15	25	314	226	126 ± 5	47.0	170 ± 5	74 ± 4	172	104

Pin assignment

Output signal 4 ... 20 mA, 2-wire

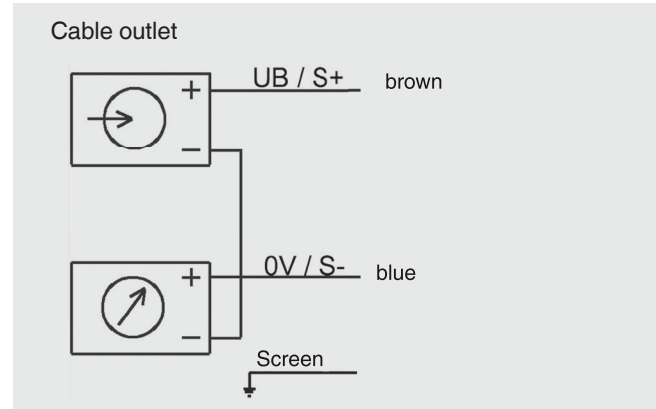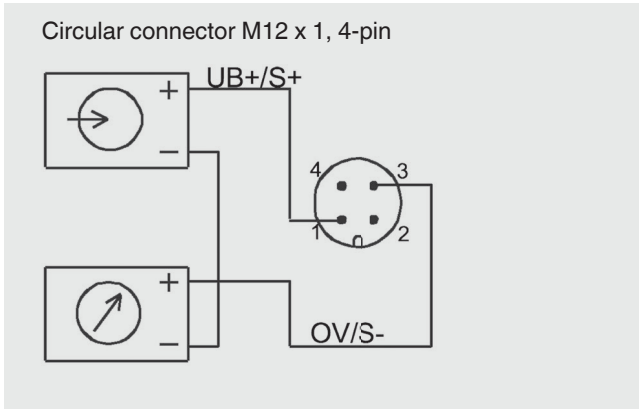

Output signal DC 0 ... 10 V, 3-wire

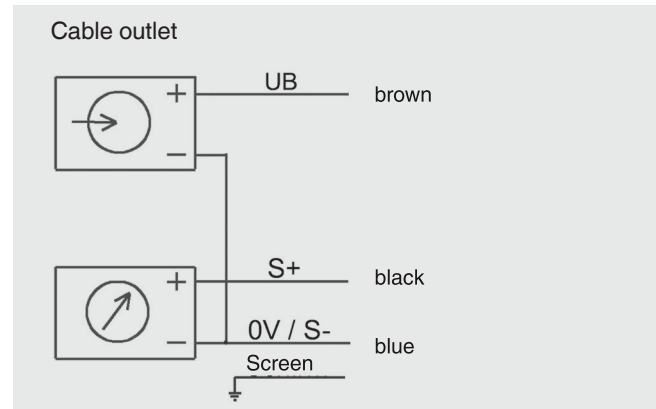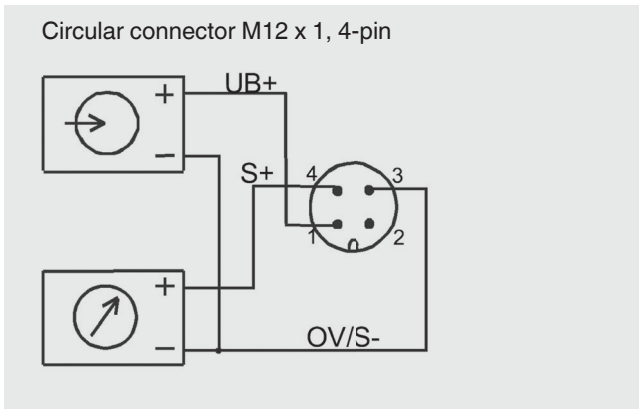

Pin configuration of connector M12 x 1, 4-pin/open cable outlet of the standard connection cable (STL 288, black)

Analogue output	4 ... 20 mA 2-wire		0 ... 10 V 3-wire	
Electrical connection	Pin	Cable outlet	Pin	Cable outlet
Supply UB+	1	Brown	1	Brown
Supply 0V	3	Blue	3	Blue
Signal S+	1	Brown	4	Black
Signal S-	3	Blue	3	Blue
Screen ⊕	Thread M 12x1	Screen	Thread M 12x1	Screen

© 2016 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.
The specifications given in this document represent the state of engineering at the time of publishing.
We reserve the right to make modifications to the specifications and materials.

